



ShowroomCharger 30-32A

Item number: 707373

ShowroomCharger 30-32A

Charger for dealerships

DEFA ShowroomCharger 30-32A is based on modern switchmode technology and galvanised divisions. This charger represents the latest technology within battery charging and will give the batteries optimum life.

It is well suited to charge lead/acid, AGM and GEL batteries up to approx. 500Ah and can maintenance charge the battery for an unlimited time.

Installation

Equipment damage and possible injuries may result from an incomplete understanding of the installation and operation of the charger.

If you are unfamiliar with electrical systems: consult us, a dealer or a licensed electrician. Read the mounting and user guide carefully.

Use


The charger can stand parallel current load up to 30A pr. channel from another user at the same time as it charge the battery.

Maintenance

The charger is maintenance free.

LED

Battery Voltage	Battery Status	LED Indication
>12.65V	95-100%	All segments on
12.55V-12.65V	80%	4 segments on
12.45V-12.55V	60%	3 segments on
12.35V-12.45V	40%	2 segments on
4.5V-12.35V	0-20%	1 segment on

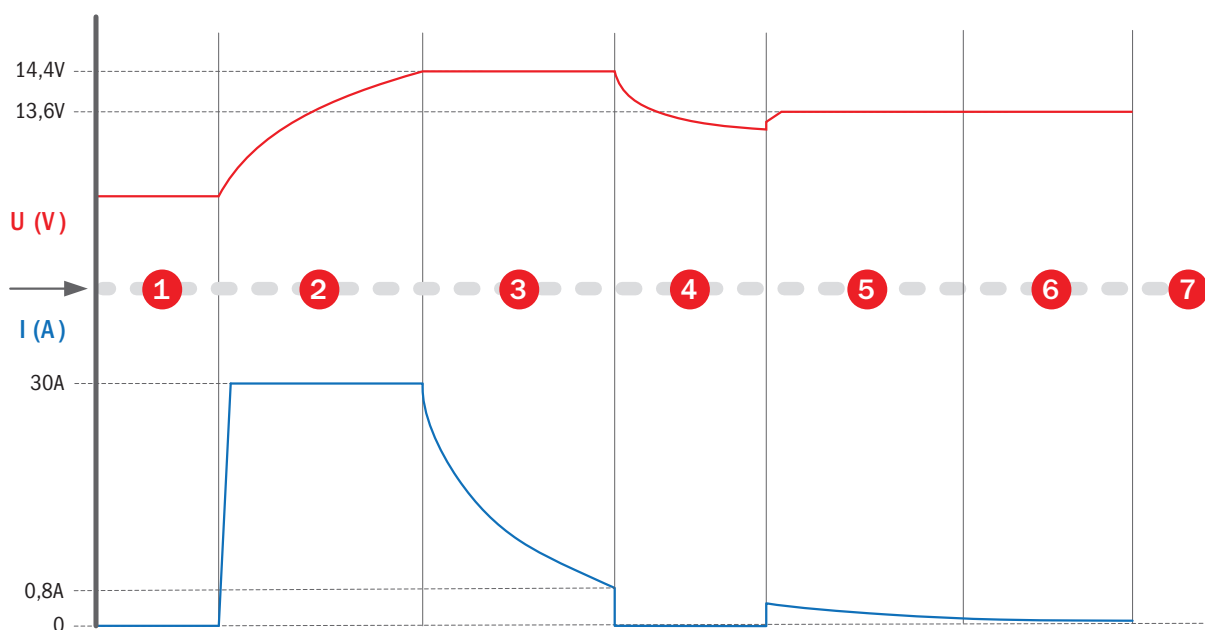

Specifications

Item number	707373
Input voltage	110-240 VAC (@ 50-60Hz)
Operating temperature	-20/+40°C or -4/+104°F
Charging voltage	14.4 VDC
Maintenance charging	13.6 VDC
AC Power cable length	5.0m/16.4ft
DC charging cable length	2.5m/8.2ft
Max charging current	@ 120V = 30A @ 230V = 32A
Battery size, max	500Ah
H/W/D	227/125/62mm or 8.9/4.9/2.4inch
Weight	1.7kg/3.75lbs
IP rating	IP40
Certifications	FCC Part 15. Certified to CSA C22.2 No. 107.2. CONFORMS TO UL STD 1236 DEFA AS is conforming to the requirements of ISO 9001, ISO 14001 and ISO 45001. In addition to this, our engine heaters and cables are conforming to the requirements of IATF 16949.



707373 E00 06012025 HG