




Charging unit not included

Power Ready S™

Item.no: 715011

Item name: Power Ready S

Wall bracket for system installations including protective cover



Power Ready S™

Wall bracket with integrated MCB and protective cover

Use Power Ready S wall bracket to prepare for easy and cost-efficient installation and expansion of your charging system. Since the wall bracket has integrated circuit breaker (MCB) there is no need for external over current protection for each point.

The wall bracket fits all cabling architecture, suitable for daisy chain, flat cable, common supply cable, rail connection, and individual cabling. Just click & lock protective cover to the prepared wall brackets. To get a complete charging station, replace cover with the charging unit and lock it.

DEFA Power S - a new generation system charging

Easy installation of wall bracket

- No need for individual external fuse for each charge point
- Integrated level for faster mounting
- Flexible insertion of supply cable
- Solid and smooth connection of the wires

Flexible cabling options

Choose the cabling architecture most suited for your installation: Suitable for daisy chain, flat cable, common supply cable, rail connection, and individual cabling.

Prepare for expansion

When installing additional Power Ready S in the charging system, it's super easy to install DEFA Power Up charging unit to complete the charging station.

Information platform


Use front cover to share information with the users and facility owner.

DEFA Power S -Security kit (item no 715055)

Protect the charging system with a security kit to avoid vandalism or theft. (accessory)


Support?

Find guides and videos on this link;
<https://www.defa.com/support/defa-power/>

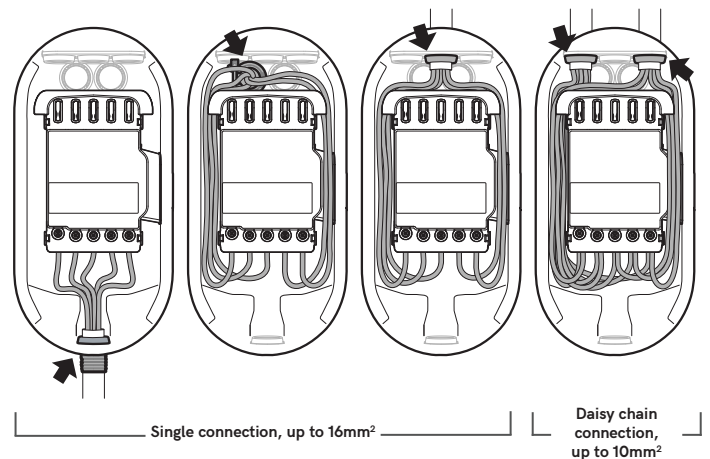

Specification

Dimension:

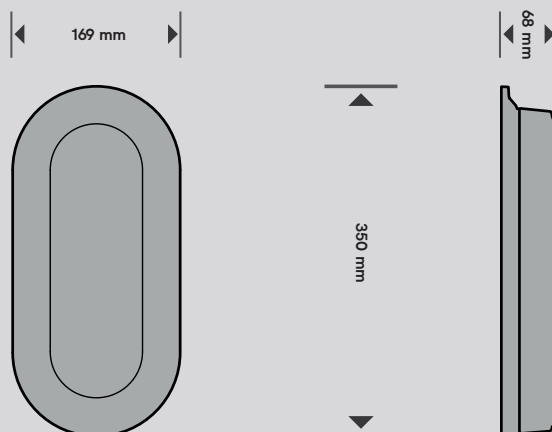

General:

Item number: 715011
EAN: 7042287150118
Dimension (mm): L: 350 x W: 169 x D: 68
Weight: 1.3 kg
Operating temperature: -40°C to +50°C
Storage temperature: -50°C to +85°C
Material: Plastic

Charging


(with charging unit)

Charging power: Up to 22kW
Charging current: 6–32A (adjustable)
Voltage: 230/400 V (1/3-phase, 50-60Hz)
Charging mode: Mode3
Connection to vehicle: Type 2
Charging cable: Included, 6 m

Interface:

(with charging unit)

Integrated display
Size: 69 mm x 69 mm
Brightness: Automatically adjusted
Power setup: App to set DEFA Power

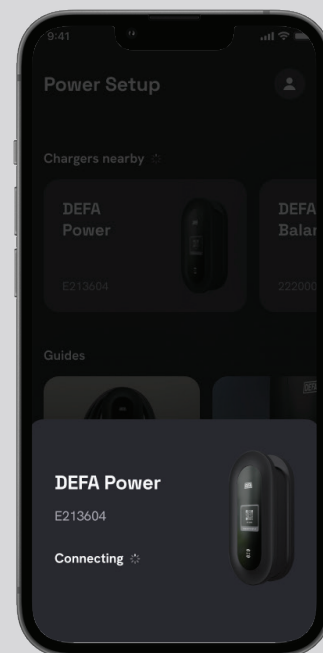

Specification

Safety & protection:

IP: 44
IK: 10
Fire classification: UL94 V0
Isolation class: I
Overvoltage category: III

Standard & certification:

CE
IEC 60947-2

Installation:

Grid: TN
Integrated fuse size: 32A
Maximum cable size: 16 mm²
Torque value: 2,5Nm
Stripping length: 20 mm +/-2

Warranty:


5 years

Recycling:


EE-waste

Included:



Protective cover

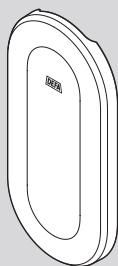

Wall bracket

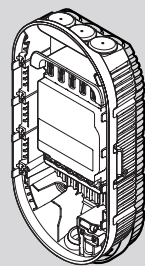

Multi grommets (x 2)



Tools & screws/plugs

