


# LED - Retrofit module G2

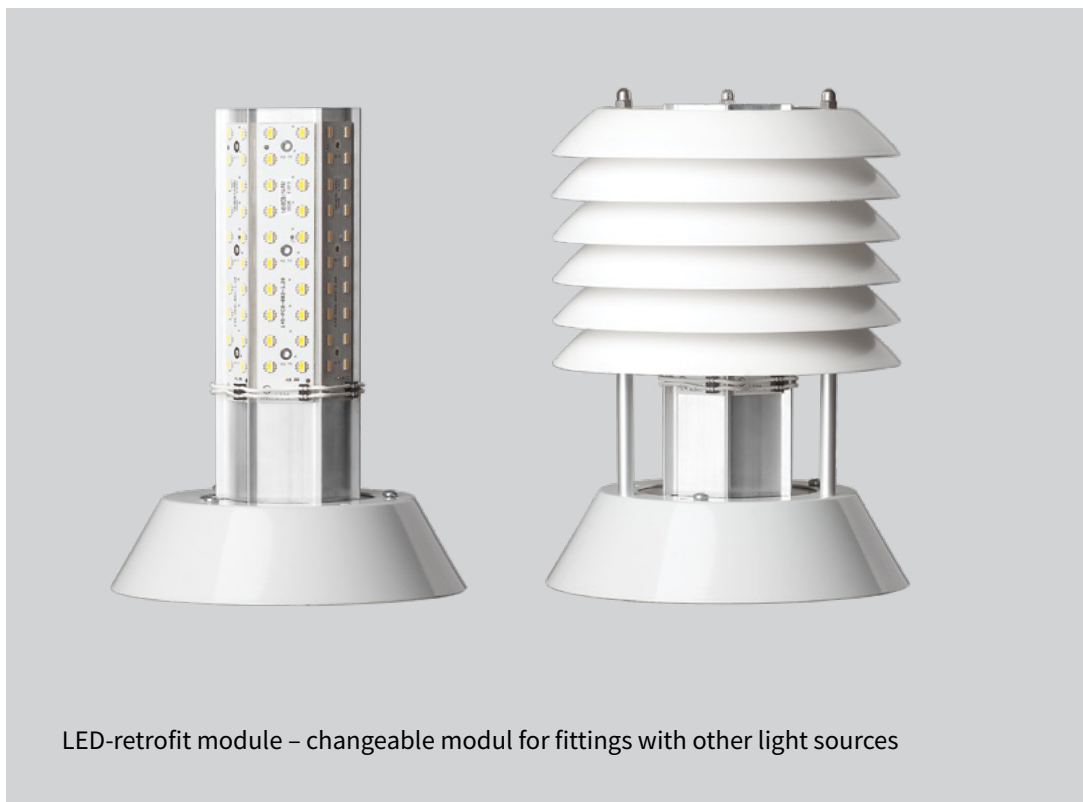

LED-retrofit module – changeable modul for fittings with other light sources

## Description

Changeable module for fittings in DEFAs Park and Bollard programme.

## Application areas

Footpaths, entrances, parks, pedestrian streets, parking area etc.

## Monting

See separate mounting instruction.

## Fittings (pcs) each circuit

|     | 10-B | 10-C | 16-B | 16-C |
|-----|------|------|------|------|
| 25W | 23   | 37   | 36   | 58   |
| 36W | 23   | 37   | 36   | 58   |

| LED modul                   | 830      | 840      |
|-----------------------------|----------|----------|
| Total effect:               | 32,3W    | 32,5W    |
| Colour temperature:         | 3000     | 4000K    |
| Lumini\ous flux LED module: | 4939 lm  | 5193 lm  |
| Colour index RA:            | 81       | 80       |
| Colour toleranse MacAdam:   | 3 SDCM   | 3 SDCM   |
| Life time L80B10:           | 91 000 h | 91 000 h |
| Ambient temperature:        | Ta: 25°C | Ta: 25°C |



Athene Park Elsa Park



Helena Park Helena Bollard

| Number | Type          | Light source |                  |             |
|--------|---------------|--------------|------------------|-------------|
| 128610 | LED-module G2 | Park         | w. reflector set | LED 32W 840 |
| 128609 | LED-module G2 | Park         | w. reflector set | LED 32W 830 |
| 128611 | LED-module G2 | Park         |                  | LED 32W 840 |
| 128310 | LED-module G2 | Park         |                  | LED 32W 830 |
| 128612 | LED-module G2 | Bollard      | w. reflector set | LED 21W 840 |
| 128613 | LED-module G2 | Bollard      | w. reflector set | LED 21W 830 |
| 128311 | LED-module G2 | Bollard      |                  | LED 21W 840 |
| 128614 | LED-module G2 | Bollard      |                  | LED 21W 830 |