



Wall bracket not included

DEFA Power Up^{T}

Item.no: 715002 Item name: DEFA Power Up w/6 meter charging cable Charging Unit ideal for system installations



DEFA Power Up[™]

Charging unit with display, integrated cable, and mobile network included. Click on the prepared wall bracket to complete DEFA Power S charge point.

The ideal solution for system installations, with the new generation EV charger. DEFA Power S offers the optimal user experience with the 6-meter integrated charging cable and display. The intuitive display is improving the user experience as well as giving the facility owner/operator the opportunity for secure payment. To complete your DEFA Power S charging station, remove the cover on the wall bracket and click and connect the DEFA Power Up charging unit to the prepared wall bracket. **DEFA Power S - a new generation system charging**.

User experience.


Intuitive high-quality display with step-by-step charging experience. Robust 6-meter Type 2 charging cable for convenient handling and use. Mobile network included.

Optimized and reliable use of available power

DEFA Power S is designed to provide the fastest possible charging without derating, and utilizing all available power in the facility.

Smart charging with operator

Check with the (CPO) Charge point operator what opportunities there are for smart charging with app.

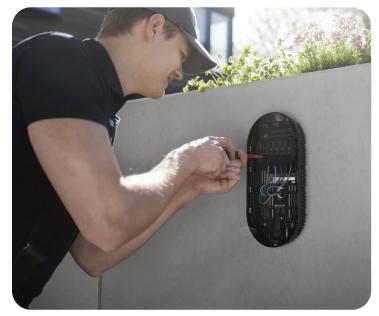

A wall bracket is prepared for DEFA Power Up. Remove the protective cover and click on the charging unit



When you have a prepared wall bracket in the facility, it is easy to click and connect the DEFA Power Up to the wall bracket.

Compliance excellence.

Demands from government and certification bodies are increasing, so compliance is becoming more and more important. DEFA Power meets all international standards and regulations (AFIR, OCPP 2.0.1, ISO 15118, among others).

DEFA Power Up charging unit is connected and DEFA Power S is ready to use





Specification

Dimension*:	168 mm	
General*:	Item number: 715002 EAN: 7042287150026 Dimension (mm): L: 350 x W: 168 x D: 85 Weight unit: 2,4 kg Weight cable: 3,5 kg Operating temperature: -40°C to +50°C Storage temperature: -50°C to +85°C Material charging unit: Polycarbonate	
Charging:	Charging power: Up to 22kW Charging current: 6—32A (adjustable) Voltage: 230/400 V (1/3-phase, 50-60Hz) Charging mode: Mode3 Connection to vehicle: Type 2 Charging cable: Included, 6 m	9:41 Il Power Setup Il Chargers nearby Il DEFA Il Power Il E213004 Il
Interface:	Integrated display Size: 69 mm x 69 mm Brightness: Automatically adjusted Power setup: App to set DEFA Power	Guides DEFA Power E213604 Connecting



Specification

Safety & protection:	RCD-DD: 6mA DC in acc. IEC62955 IP: 55 IK: 10 Fire classification: UL94 VO Isolation class: I Overvoltage category: III Overheat protection: Internal sensor
Standard & certification (with Power Ready S):	CE IEC61851 IEC62955 IEC61439-7 IEC60947-2 ACSEV
Installation:	Grid: TN / IT / TT Fuse size: 32A
Warranty:	5 years
Recycling:	EE-waste
Included*:	Charging unit with 6 m charging cableCable clipLocking toolImage: Charging cableImage: Charg
	*Spesifications without wall bracket.

